




# Bi-Block

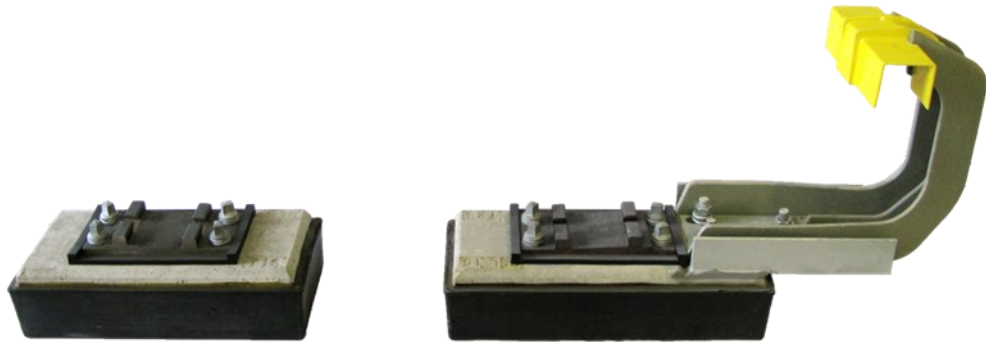

## Benefits

- For rails on slab tracks
- With or without fastening for conductor rails
- Low noise nuisance
- Additionally we offer you individual solutions

## Technical Data

<b>Length</b>	0,64 m / 0,69 m
<b>Width</b>	0,30 m
<b>Height</b>	0,17 m
<b>Weight</b>	75 kg / 85 kg
<b>Gauge</b>	as required
<b>Concrete</b>	C45/55
<b>Axle load</b>	115 kN
<b>Speed</b>	≤ 120 km/h
<b>Rail Type</b>	49E1
<b>Reinforcement</b>	rebar St 550
<b>Rail Fastening System</b>	ribbed plates

**SSL - Schwellenwerk und Steuerungstechnik Linz GmbH**

Salzburger Str. 305 • 4030 Linz • Austria • Tel. +43 732 38 14 22 • Fax +43 732 38 14 22 50 • mail@ssl-linz.at